
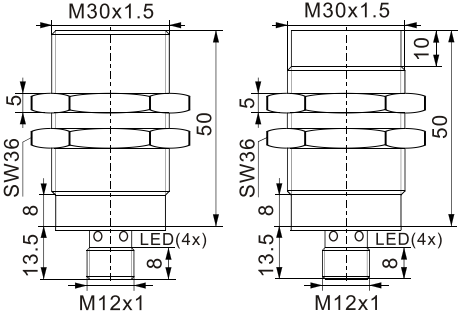


M30x50					
10mm	15mm				
埋入	非埋				
ISM30-M10NA-Y3U4/S50	1	ISM30-F15NA-Y3U4/S50			
ISM30-M10NB-Y3U4/S50	2	ISM30-F15NB-Y3U4/S50			
ISM30-M10NC-Y3U4/S50	3	ISM30-F15NC-Y3U4/S50			
ISM30-M10PA-Y3U4/S50	4	ISM30-F15PA-Y3U4/S50			
ISM30-M10PB-Y3U4/S50	5	ISM30-F15PB-Y3U4/S50			
ISM30-M10PC-Y3U4/S50	6	ISM30-F15PC-Y3U4/S50			
ISM30-M10SZ-Y3U4/S50	9	ISM30-F15SZ-Y3U4/S50			
ISM30-M10ZZ-Y3U4/S50	22	ISM30-F15ZZ-Y3U4/S50			
					
					
10mm±10%	15mm±10%				
1~10%	1~10%				
铁30x30x1mm	铁45x45x1mm				
300Hz	200Hz				
≤Sn±3%					
≤0.01mA					
≤10mA					
≤200mA					
≤2V					
极性反接保护;上电脉冲抑制保护;负载短路保护					
动作指示灯(黄色)					
-25~+70°C					
≤Sn±10%					
-25~+80°C					
50MΩ以上(DC 500V兆欧表),充电部整数和外壳之间					
符合标准EN60947-5-2					
IP67					
电缆线2M; 外径 φ5.0mm					
外壳材料:不锈钢;检测面材料:不锈钢					
注: 1,2,3,4,5,6,9,22为接线图号, 请见05页。如需其它电压规格(DC 5V,DC 10-60V)请咨询我公司。					

1 电感式传感器

2 电容式传感器

3 磁感式传感器

4 光电传感器

5 传感器附件

6 词汇表